Purist®

KOHLER, Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm

K-14406-4

Features

- Two Lever handles offer separate control of hot and cold water
- 5-1/2" (140 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- KOHLER[®] ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom
- Includes metal touch-activated drain with 1-1/4" tailpiece

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing


Installation

- Handles are preassembled on valves to simplify installation
- For 8" 16" (203 406 mm) centers
- Widespread

Recommended Products/Accessories

K-23726 Drain treatment K-14375 24" Double Towel Bar K-14377 Pivoting toilet paper holder K-14435 18" Towel Bar K-14436 24" Towel Bar K-14441 Towel Ring K-14443 Robe Hook K-14444 Vertical toilet paper holder







Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® Faucet Lifetime Limited Warrantv

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

		•
С	P	Polished Chrome
S	N	Vibrant® Polished Nickel
A	F)	Vibrant® French Gold
B	N	Vibrant® Brushed Nickel
B	V	Vibrant® Brushed Bronze
В	SL	Matte Black
21	ЛB .	Vibrant® Brushed Moderne
	l	Brass






1-800-4KOHLER (1-800-456-4537)

Purist® KOHLER Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm

K-14406-4

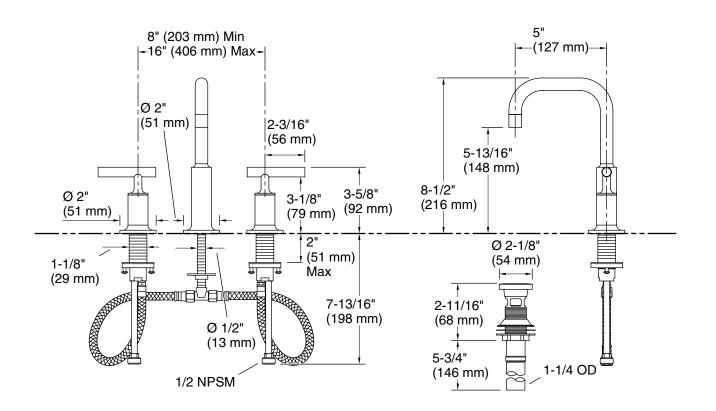

Technical Information

All product dimensions are nominal.

Faucet flow rate:

Drain included: Drain tailpiece

included:

Spout:

Spout reach:

5" (127 mm)

Yes

Yes

Notes

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

1.2 gal/min (4.5 l/min)

