




include LED lights that illuminate the bottle filling area. Bottle filler housing construction shall be galvanealed steel with black powder coat finish. Bottle filler shall provide up to 1.2 gpm flow rate with a laminar flow. Cabinet door shall have swing-open mechanism, providing easy access for filter replacement.

**DOWNLOADS**

- [Additional Downloads](#)

**ROUGH-IN**

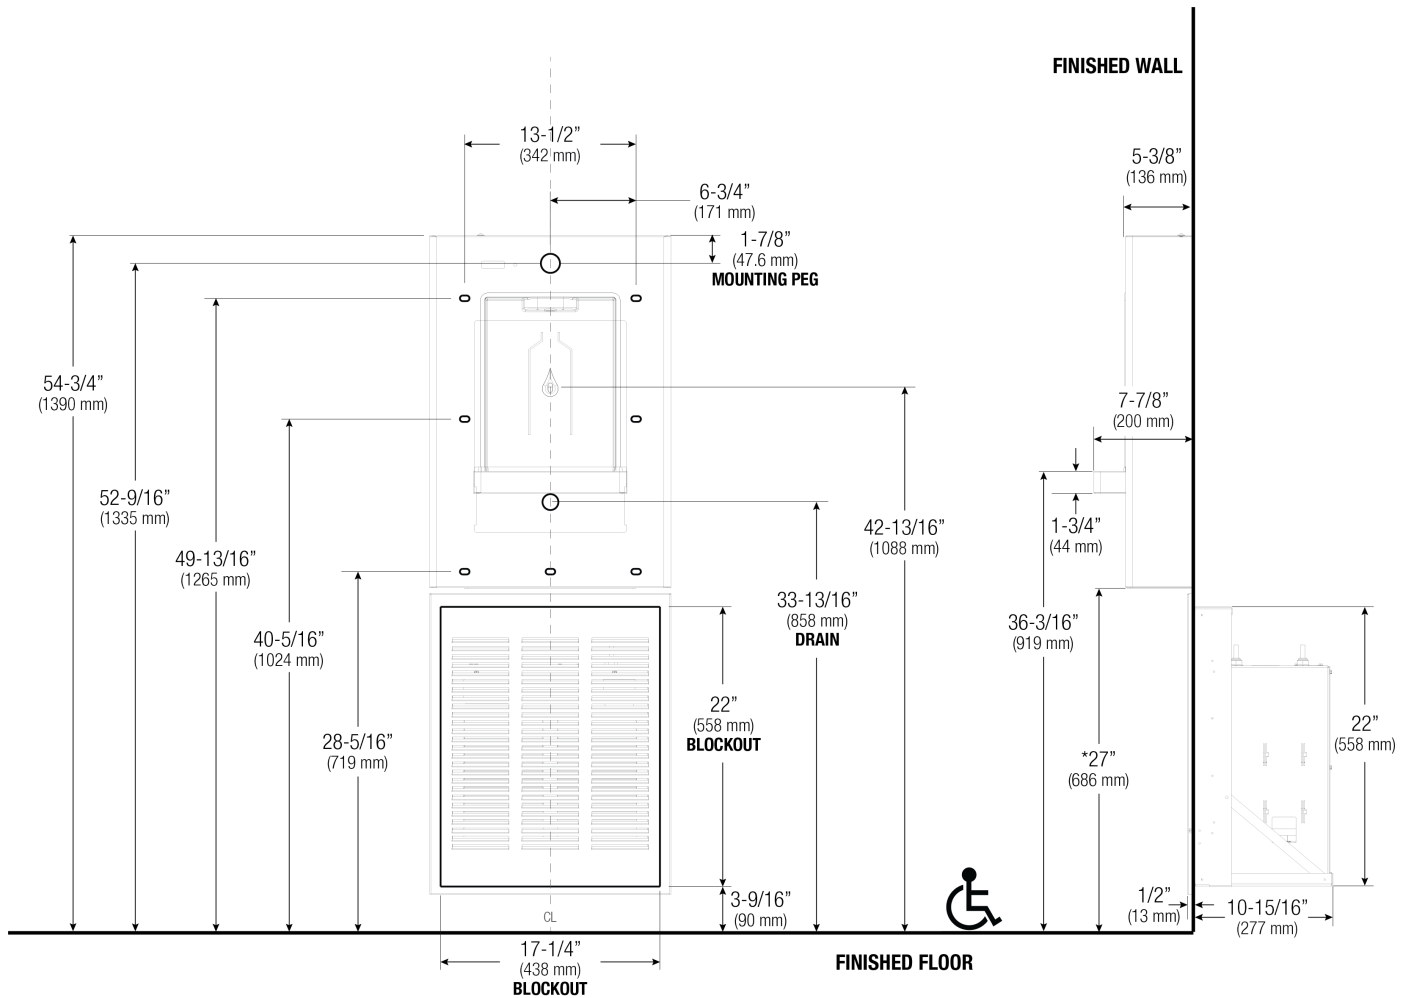

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)