
# SYMMONS<sup>®</sup> Temptrol<sup>®</sup>



## PRESSURE BALANCING TUB/SHOWER VALVE BODY SPECIFICATION SUBMITTAL

#### MODEL NUMBERS

#### 262XBODY

Pressure Balancing tub/shower valve body **162XBODY** 

Pressure Balancing tub/shower valve body pressure testing cap

#### FEATURE HIGHLIGHTS

- Brass, bronze and stainless steel construction
- Pressure balancing mixing valve to maintain safe shower temperature
- Adjustable stop screw to control maximum hot water temperature to valve
- Integral service stops allow water shut-off for valve servicing
- 4 port valve body in common plane
- Inlets: 1/2" IPS and 1/2" sweat
- Outlets: 1/2" IPS and 1/2" sweat
- Accommodates back to back installations
- Accommodates thin wall installations
- Stringer mounts included

#### **OPTIONS/MODIFICATIONS**

<b>-BR</b> Mounting bracket
-----------------------------

-CHKS Integral check stops for use in installations where a positive shut-off device is used downstream of valve
 -RV Reverse seat for back to back installations

#### **INLET/OUTLET ADAPTERS**

- □ -CP CPVC fittings
- **-P1** PEX crimp fittings
- **-P2** PEX expansion fittings
- **-P3** ProPress fittings

#### COMPLIANCE


- ASME A112.18.1/CSA B125.1
- ASSE 1016
- Buy American Act Compliant


### WARRANTY


**Limited Lifetime** - to the original end purchaser in consumer installations.

**5 Years** - for commercial installations.

Refer to www.symmons.com/warranty for complete warranty information.

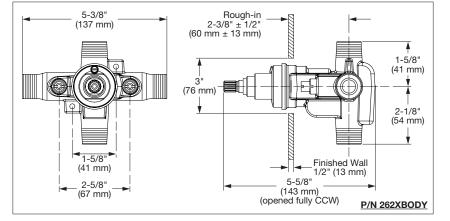

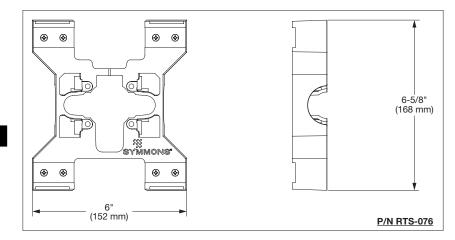

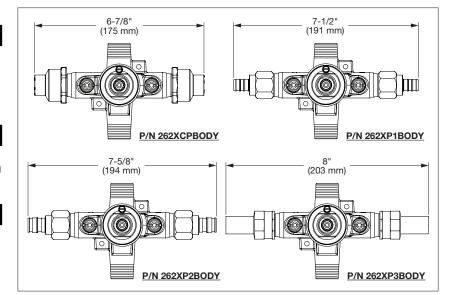

Symmons Industries, Inc. 

31 Brooks Drive
Braintree, MA 02184
Phone: (800) 796-6667
Fax: (800) 961-9621
Copyright © 2019 Symmons Industries, Inc.
symmons.com
gethelp@symmons.com
ZV-1773 REV A
060419