

### CODE NUMBER

3325410

#### DESCRIPTION

1.6/3.5 gpf, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Electrical Override, Battery, Fits †Zurn® valve bodies, G2 Exposed Sensor Water Closet Retrofit Flushometer.

#### DETAILS

- Flush Volume: 1.6/3.5 gpf (6.0/13.2 Lpf)
- Finish: Polished Chrome (CP)
- Power Type: Battery
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet
- Fixture Connection: Top Spud
- Override: Electrical
- Special Features: Fits †Zurn® valve bodies (Z)

#### **FEATURES**

 Valve shall be in compliance to the applicable sections of ASSE 1037



#### **COMPLIANCES & CERTIFICATIONS**



(ADA Compliant, BAA Compliant, UPC Certified)

#### **RECOMMENDED SPECIFICATION**

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi- Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

### **BATTERY SPECIFICATIONS**

Usage	4- AA Battery Service* Life			
	14.5 yrs	12 yrs	7.2 yrs	6 yrs
per month	500	1,000	3,000	4,000
per day	25	50	150	200

\* Service life varies according to actual usage & restroom conditions

Battery shelf life: Alkaline= ~10 years - Lithium= ~25 years

## **ELECTRICAL SPECIFICATIONS**

• Flush Delay: 3s

### VALVE OPERATING PRESSURE (FLOWING)

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

### DOWNLOADS

- G2 and ECOS Single Flush Optima Plus Valve Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Sloan Optima Plus Flushometers Repair and Maintenance Guide
- Additional Downloads

### NOTES

All information contained within this document subject to

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

# G2 SENSOR FLUSHOMETER G2 RESS-C-1.6/3.5-Z


change without notice.

Looking for other variations of the G2 RESS-C product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer. Find a compatible water closet for this flushometer.

† The brands and/or products names referenced herein may be subject to trademark rights of their respective owners. Use of the brands and names is for identification purposes only and does not imply affiliation with or endorsement by Sloan.

WARRANTY View Warranty Information

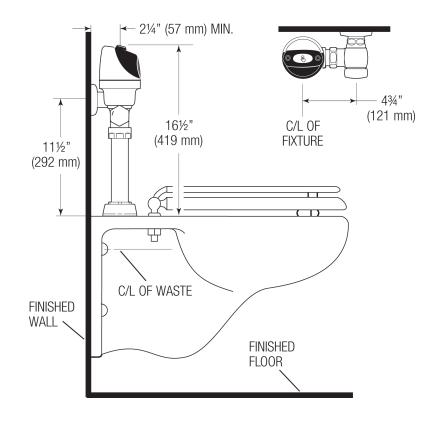

**ROUGH-IN** 

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com